


Product information

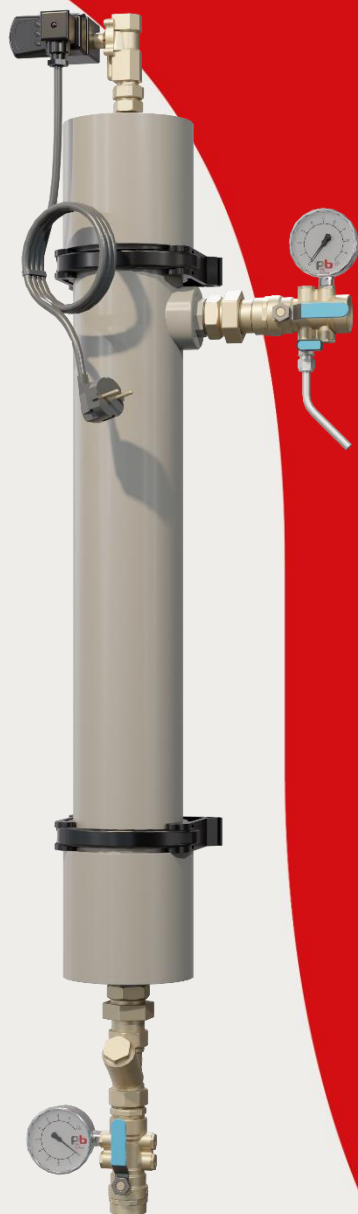

DeavX +

The DeavX + filter module is an independently operating filter and can easily be used as a gatekeeper in a small-scale pipeline network, a pipe section or an individual tapping point. The filter is suitable for cold water installations with a maximum temperature of 70°C | 158°F.

With the periodic forward flush, pollution is automatically flushed away. The automatic flushing of the filter combined with annual maintenance results in a lifespan of 5 years.

The DeavX + has minimal management costs, annual thorough cleaning of the modules and settings check is sufficient.

Details

Included in product:

- Solenoid and timer
- Three way couplings
- Manual valves
- Manometers
- Mesh prefilter
- Check valve
- Filter clamps
- Power cord 2m | 78"

Art. nr.	Description	Capacity*		HxWxD (cm)
1106050650	DeavX 1+	0,8 m ³ /h	3.5 GPM	94x29x12
1106090510	DeavX 2+	1,5 m ³ /h	6.6 GPM	94x35x15
1106090100	DeavX 3+	2,5 m ³ /h	11 GPM	143x35x15
1106160100	DeavX 4+	6 m ³ /h	26 GPM	154x37x20

* At clean water flux 16°C / 60°F | 2 bar / 29 PSI.

- Long-term solution against legionella
- Plug-and-play delivered
- Applications: shower, legionella prevention, pre filtration reverse osmose, restaurants
- Ask for the full additional options list
- Ask for technical datasheet

